


HERFLEX SC100 - SC330



Bridge Expansion Joints

Herflex system allows the absorption of large movements due to its multidirectional deformation elastic element. Effective sealing, low maintenance and easy replacement are guaranteed.

HERFLEX HF models cover a movement range that goes from 100mm to 330mm.

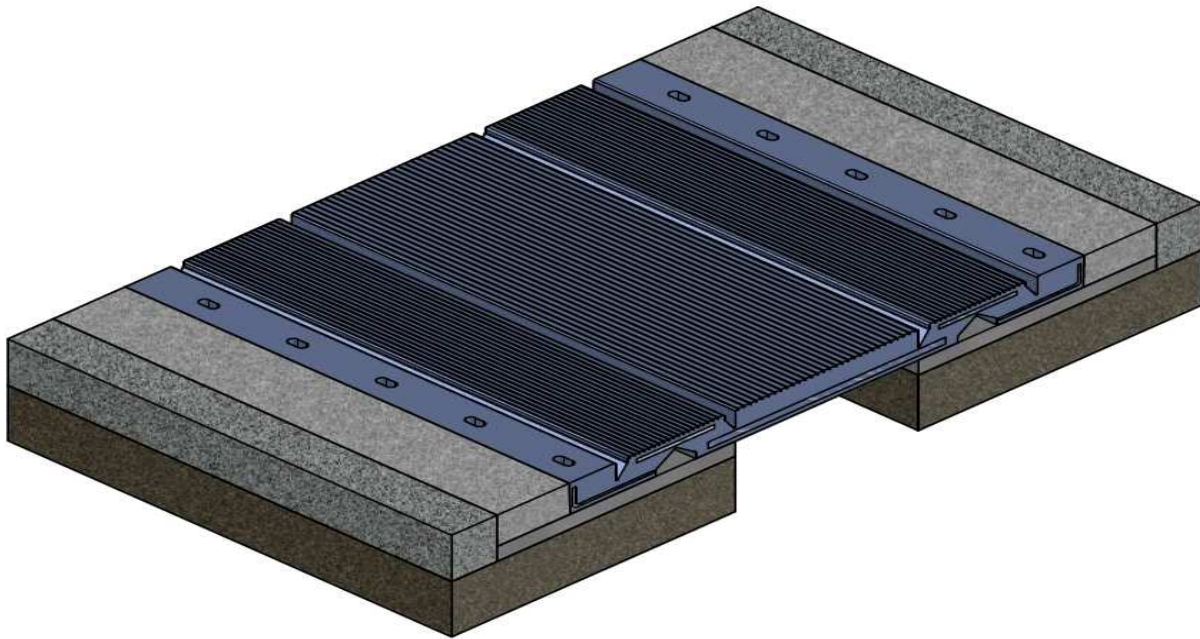

Models	Main Dimensions							Anchor
	Allow movement (mm)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	
SC-100	100(±50)	1835	55	588	498	305	96	M-18x180
SC-160	160(±80)	1840	74	712	612	305	135	M-20x180
SC-230	230(±115)	1825	93	890	794	305	160	M-22x200
SC-330	330(±165)	1240	127	1190	1080	305	214	M-24x200

A- Length

B- Height

C- Width

D- Transverse distance between anchors

E- Longitudinal distance between anchors

F- Maximum opening at the moment of installation at average temperature

G- Bolt diameter

Main applications:

- Structures with a movement range between 210mm and 380mm
- Viaducts and bridges in seismic zones
- Large structures

Technical information:

Elastomer properties	Value	Test method
Hardness	62±5 Shore A	ASTM D2240
Elongation at break	>450 %	ASTM D412. Muestra C
Tensile strength	>15 Mpa	ASTM D412. Muestra C
Rubber-steel adhesion	>8 N/mm	ASTM D429 Método B
Low temperature strength	Uncrystallized	ASTM D746 (1hour at -40º)
Ozone resistance	No cracks	ASTM D1171 (48 hours at 38ºC;25 PPHM)
Compression set	<20%	ASTM D395 MétodoB(24 hours at 70ºC)
Thermal aging	Tensile strength Max -20% Elongatio at break máx.-25%,min+10% Hardness máx. ±5 Sh.A	Aging ASTM D573 (168 HOURS AT 70ºC)

Metal component:
Steel fabricated acc. EN10025 Type SC235

Notes:

Information on this technical sheet is merely indicative and is based on laboratory experimental results. HERFLEX SYSTEMS does not accept any responsibility if any of the data supplied suffers any variations or if is not correct. In the same way, any recommendation or product use suggestions are provided without any guarantee as the mode of use cannot be controlled by HERFLEX SYSTEMS. Therefore, it is the responsibility of the customer to make sure that the product is appropriate for the required application, as well as its correct usage.

HERFLEX SISTEMAS, S.A

Polígono Industrial Torrelarragoiti, Parcela 8A, Pabellones 1-2-3-48170 Zamudio(Vizcaya)

Tel.:+34 944 520 439- comercial@herflex.es